

Menu Route Map

Network Settings
Select Wired/Wireless LAN*
Wired LAN , Wireless LAN
Wireless LAN Settings*
WPS Push Button Mode
WPS PIN Code Mode
SSID Settings
Select Access Point
Enter Manually
Security Settings
None
WEP
Open System , Shared Key
WPA/WPA2-PSK
Auto , AES-CCMP
Power Save Mode
Off , On
Connection Information
MAC Address
Wireless LAN Status
Latest Error Information
Channel
SSID Settings
Security Settings
Power Save Mode
Enable Direct Connection*
Off , On
TCP/IP Settings
IPv4 Settings
IP Address Settings
Auto Acquire
Select Protocol
Off , DHCP
Auto IP
Off , On
Manually Acquire
IP Address: 0.0.0.0
Subnet Mask: 0.0.0.0
Gateway Address: 0.0.0.0
Check Settings
Auto Acquire
IP Address
Subnet Mask
Gateway Address
PING Command
DNS Settings
DNS Server Settings
Primary DNS Server: 0.0.0.0
Secondary DNS Server: 0.0.0.0
DNS Host Name/Domain Name Settings
Host Name
Domain Name
DNS Dynamic Update Settings
Off , On
0 to 24 to 48 (hr.)
mDNS Settings
Off , On
DHCP Option Settings
Acquire Host Name
Off , On
DNS Dynamic Update
Off , On
Acquire DNS Server Address
Off , On
Acquire Domain Name
Off , On
Acquire WINS Server Address
Off , On
Acquire SMTP Server Address
Off , On
Acquire POP Server Address
Off , On
IPv6 Settings
Use IPv6
Off , On, Check Settings
Link-Local Address
Prefix Length
Stateless Address Settings
Off , On , Check Settings
Stateless Address
Prefix Length
Use DHCPv6
Off , On, Check Settings
Stateful Address
Prefix Length
DNS Settings
DNS Host Name/Domain Name Settings
(Use IPv4 Host/Domain)
Off , On
Host Name
Domain Name
DNS Dynamic Update Settings
Off , On
Register Manual Address
Off , On
Register Stateful Address
Off , On
Register Stateless Address
Off , On
DNS Dynamic Update Interval
0 to 24 to 48 (hr.)
mDNS Settings
Off , On
Off (mDNS Name), On
DHCP Option Settings
Acquire DNS Server Address
Off , On
Acquire Domain Name
Off , On
WINS Settings
WINS Resolution
Off , On(WINS Server Address: 0.0.0.0)
LPD Settings
LPD Print Settings
Off , On
RX Timeout
1 to 5 to 60 (min.)
RAW Settings
RAW Print Settings
Off , On
RX Timeout
1 to 5 to 60 (min.)
WSD Settings
WSD Print Settings
Use WSD Print
Off , On
Use WSD Browsing
Off , On
WSD Scan Settings
Use WSD Scan
Off , On
Use Computer Scan
Off , On
Use Multicast Discovery
Off , On
Use FTP PASV Mode
Off , On
Use HTTP
Off , On

Port Number Settings
LPD
1 to 515 to 65535
RAW
1 to 9100 to 65535
WSD Multicast Discovery
1 to 3702 to 65535
HTTP
1 to 80 to 65535
Multicast Discovery
1 to 427 to 65535
POP3
1 to 110 to 65535
SMTP
1 to 25 to 65535
FTP
1 to 21 to 65535
SNMP
1 to 161 to 65535
MTU Size
1300, 1400, 1500
SNMP Settings
SNMPv1 Settings
Off , On
SNMPv3 Settings
Off , On
Acquire Printer Management Information from Host
Off , On
Dedicated Port Settings
Off , On
Waiting Time for Connection at Startup
0 to 300 (sec.)
Ethernet Driver Settings
MAC Address
Auto Detect
Off , On
Communication Mode
Half Duplex , Full Duplex
Ethernet Type
10BASE-T , 100BASE-TX, 1000BASE-T
IEEE 802.1X Settings
Off , On
Device Settings Management On/Off
Off , On
Monitoring Service
Off , On
Initialize Network Settings

Settings marked with (*) are only available for the D1550.

Preferences
Display Settings
Default Screen after Startup/Restoration
Home , Copy, Fax*, Scan, Memory Media Print
Home Screen Button Display Settings
Select Button to Display
Favorite Copy Settings
Favorite Fax Settings*
Favorite Scan Settings
Set Display Order
Insert and Delete Blank
Brightness
Five Levels
Invert Screen Colors
Off , On
Millimeter/Inch Entry Switch
Millimeter, Inch
Gram/Pound Switch
Gram, Pound
Message Display Time
1 to 2 to 5 (sec.)
Scrolling Speed
Slow, Standard , Fast
Cursor Movement Type
Auto , Manual
Language
English , Japanese, French, Spanish, German, Italian, Portuguese, Chinese (Simplified), Chinese (Traditional), Korean
Remote UI Language
English , Japanese, French, Spanish, German, Italian, Portuguese, Chinese (Simplified), Chinese (Traditional), Korean
English Keyboard Layout
USA Layout , UK Layout

Settings marked with (*) are only available for the D1550.

Timer Settings
Date/Time Settings
Date Format
YYYY MM/DD, MM/DD/YYYY , DD/MM YYYY
Time Format
12 Hour (AM/PM) , 24 Hour
Current Date/Time Settings
Time Zone
UTC-12:00 to (UTC-05:00) Eastern Time (US & Canada) to UTC+14:00
Daylight Saving Time Settings
Off , On
Start: Month, Week, Day
End: Month, Week, Day
Auto Reset Time
0=Off (Auto Reset is disabled.), 1 to 2 to 9 (min.)
Function After Auto Reset
Default Function , Selected Function
Auto Sleep Time
3 to 240 (min.)
Auto Offline Time
0=Off (The machine remains online.), 1 to 5 to 60 (min.)

Common Settings
Drawer Auto Selection On/Off
Copy
Multi-Purpose Tray
Off , On
Drawer 1
Off , On
Drawer 2*
Off , On
Printer
Drawer 1
Off , On
Drawer 2*
Off , On
Receive/Fax (D1550) / Receive (D1520)
Multi-Purpose Tray
Off , On
Drawer 1
Off , On
Drawer 2*
Off , On
Other
Multi-Purpose Tray
Off , On
Drawer 1
Off , On
Drawer 2*
Off , On
Switch Paper Feed Method
Multi-Purpose Tray
Speed Priority , Print Side Priority
Drawer 1
Speed Priority , Print Side Priority
Drawer 2*
Speed Priority , Print Side Priority

Settings marked with (*) are only available when the optional paper drawer (drawer 2) is attached.

Copy Settings
Change Default Settings
Number of Copies
1 to 999
Density
Nine Levels
Background
Auto
Adjust (Manual)
Nine Levels
Original Type
Text, Text/Photo , Text/Photo (Quality), Photo
2-Sided
Off , 1-Sided->2-Sided, 2-Sided->2-Sided, 2-Sided->1-Sided, Original/Finishing Type
Copy Ratio
Custom Ratio, 100% (Direct) , 400% (Max), 200%, 129% STMT->LTR, 78% LGL->LTR, 64% LTR->STMT, 50%, 25% (Min)
Paper
Multi-Purpose Tray, Drawer 1 , Drawer 2*, Auto Select Paper (LTR/LGL)
N on 1
Off , 2 on 1, 4 on 1, ID Card Copy, Select Layout
Collate
Off , On
Erase Frame
Off , On
Sharpness
Seven Levels
Initialize Default Settings


Settings marked with (*) are only available when the optional paper drawer (drawer 2) is attached.

Fax Settings*
Basic Settings
Register Unit Telephone Number
Select Line Type
Pulse, Tone
Off-Hook Alarm
0 to 3
Communication Management Settings
TX Start Speed
33600 bps , 14400 bps, 9600 bps, 7200 bps, 4800 bps, 2400 bps
RX Start Speed
33600 bps , 14400 bps, 9600 bps, 7200 bps, 4800 bps, 2400 bps
Archive TX Document
Off , On
TX Function Settings
Change Default Setting
Resolution
200 x 100 dpi (Normal) , 200 x 200 dpi (Fine), 200 x 200 dpi (Photo), 200 x 400 dpi (Superfine), 400 x 400 dpi (Ultrafine)
Density
Nine Levels
2-Sided Original
Off , Book Type, Calendar Type
Sharpness
Seven Levels
Register Unit Name (Fax)
ECM TX
Off , On
Set Pause Time
1 to 2 to 15 (sec.)
Auto Redial
Off , On
Number of Times to Redial
1 to 2 to 10 (times)
Redial Interval
2 to 99 (min.)
Redial When Error Occurs
Off , On
TX Terminal ID
Off , On
Print Position
Inside Image Area, Outside Image Area
Mark Number as
FAX , TEL
Check Dial Tone Before Sending
Off , On
Allow Fax Driver TX
Off , On
Confirm Entered Fax Number
Off , On
Restrict Sequential Broadcast
Off , Confirm Sequential Broadcast, Reject Sequential Broadcast
Initialize Default Settings
RX Function Settings
ECM RX
Off , On
Incoming Ring
Off , On
Remote RX
Off , On
00 to 25 to 99
Switch to Auto RX
Off , On
1 to 15 to 99 (sec.)
Memory Lock Settings
Off , On
Memory Lock PIN
Report Print
Off , On
Memory Lock Time
Off , On
Memory Lock Start Time
Memory Lock End Time
RX Print Settings
Print on Both Sides
Off , On
Reduce RX Size
Off , On
Ratio
Auto , 97%, 95%, 90%, 75%
Direction
Vertical/Horizontal, Vertical Only
RX Page Footer
Off , On
Continue Printing When Amount in Cartridge Is Low
Off , On
Forwarding Settings
Enable Forwarding Settings
Off , On
Print Images
Off , On , Only When Error Occurs
Store Images in Memory
Off , Only When Error Occurs
Fax Setup Guide


Settings marked with (*) are only available for the D1550.

Scan Settings
USB Memory Settings
Change Default Settings
Scan Size
LTR , LGL, STMT
Color Mode
Color , Black & White
File Format
PDF , PDF (Compact), PDF (Compact/OCR), PDF (OCR), JPEG, TIFF
Density
Nine Levels
Original Orientation
Portrait , Landscape
Original Type
Text, Text/Photo , Photo
2-Sided Original
Off , Book Type, Calendar Type
Sharpness
Seven Levels
Data Size
Small: Memory Priority, Standard , Large: Image Quality Priority
Initialize Default Settings
E-Mail Settings
Change Default Settings
Scan Size
LTR , LGL, STMT
Color Mode
Color , Black & White
File Format
PDF
PDF (Compact)
PDF (Compact/OCR)
PDF (OCR)
JPEG
TIFF
Set PDF/TIFF Details
PDF
Divide into Pages: Off , On
PDF (Compact)
Divide into Pages: Off , On
PDF (Compact/OCR)
Divide into Pages: Off , On
PDF (OCR)
Divide into Pages: Off , On
TIFF
Divide into Pages: Off , On
Density
Nine Levels
Original Orientation
Portrait , Landscape
Original Type
Text, Text/Photo , Photo
2-Sided Original
Off , Book Type, Calendar Type
Sharpness
Seven Levels
Data Size
Small: Memory Priority, Standard , Large: Image Quality Priority
Subject/Message
Subject
Message
Reply To
None , Specify from Address Book
Priority
Low, Standard , High
Initialize Default Settings
I-Fax Settings
TX Function Settings
Change Default Settings
Scan Size
LTR , LGL, STMT
Density
Nine Levels
Original Type
Text , Text/Photo, Photo
2-Sided Original
Off , Book Type, Calendar Type
Sharpness
Seven Levels
Subject/Message
Subject
Message
Reply To
None , Specify from Address Book
TX Terminal ID
Off
On
Print Position
Inside Image Area, Outside Image Area
Initialize Default Settings
RX Print Settings
Print on Both Sides
Off , On
RX Print Size
A4, LGL, LTR , OFICIO, Brazil-OFICIO, Mexico-OFICIO, Government-LTR, Government-LGL, FOOLSCAP, AUS-FOOLSCAP, India-LGL
File Settings
Change Default Settings
Scan Size
LTR , LGL, STMT
Color Mode
Color , Black & White
File Format
PDF
PDF (Compact)
PDF (Compact/OCR)
PDF (OCR)
JPEG
TIFF
Set PDF/TIFF Details
PDF
Divide into Pages: Off , On
PDF (Compact)
Divide into Pages: Off , On
PDF (Compact/OCR)
Divide into Pages: Off , On
PDF (OCR)
Divide into Pages: Off , On
TIFF
Divide into Pages: Off , On
Density
Nine Levels
Original Orientation
Portrait , Landscape
Original Type
Text, Text/Photo , Photo
2-Sided Original
Off , Book Type, Calendar Type
Sharpness
Seven Levels
Data Size
Small: Memory Priority, Standard , Large: Image Quality Priority
Initialize Default Settings
Register Unit Name (E-Mail/I-Fax)
Output File Image Settings
YCbCr TX Gamma Value
Gamma 1.0, Gamma 1.4, Gamma 1.8 , Gamma 2.2
OCR (Text Searchable) Settings
Smart Scan
Off , On



Menu Route Map

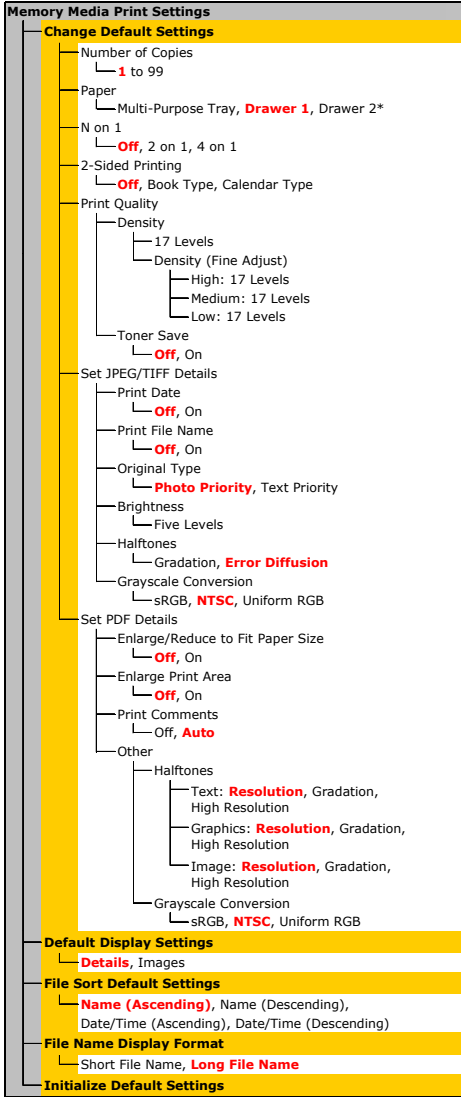

Settings marked with (*) are only available when the optional paper drawer (drawer 2) is attached.

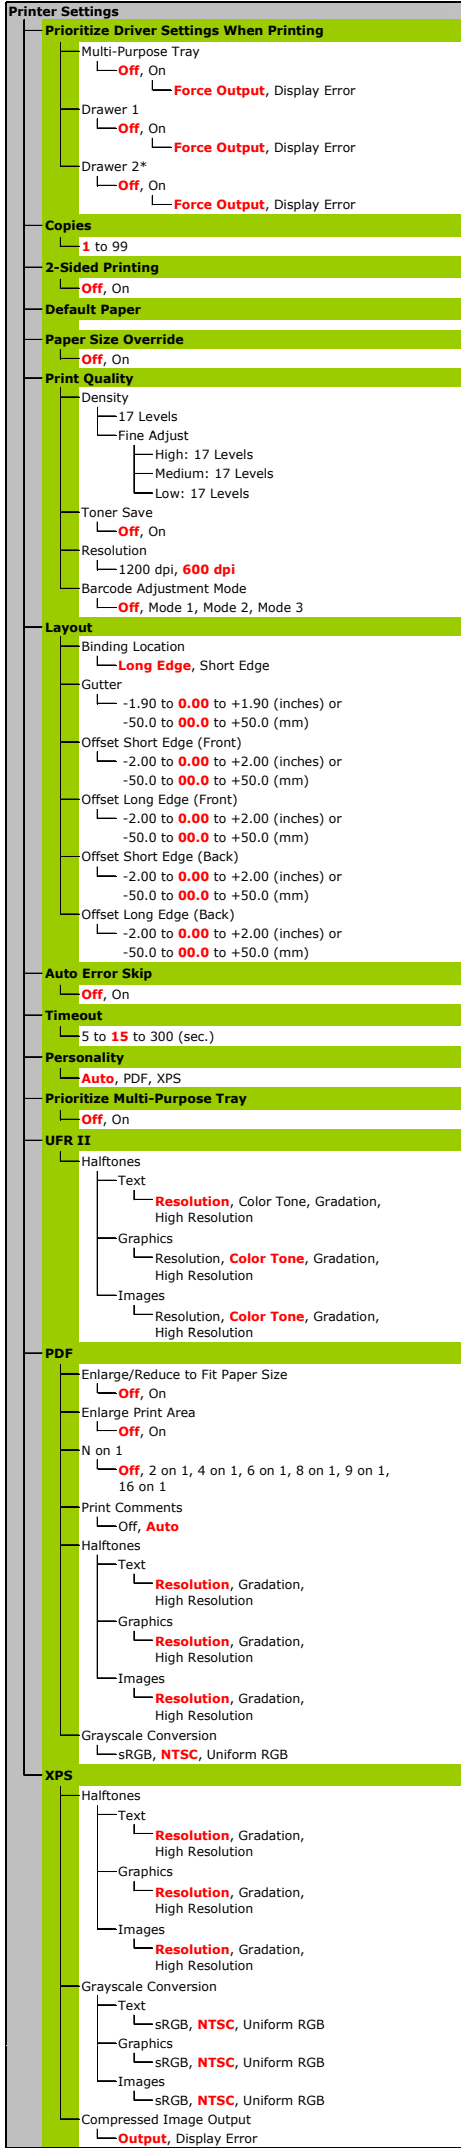

Settings marked with (*) are only available when the optional paper drawer (drawer 2) is attached.

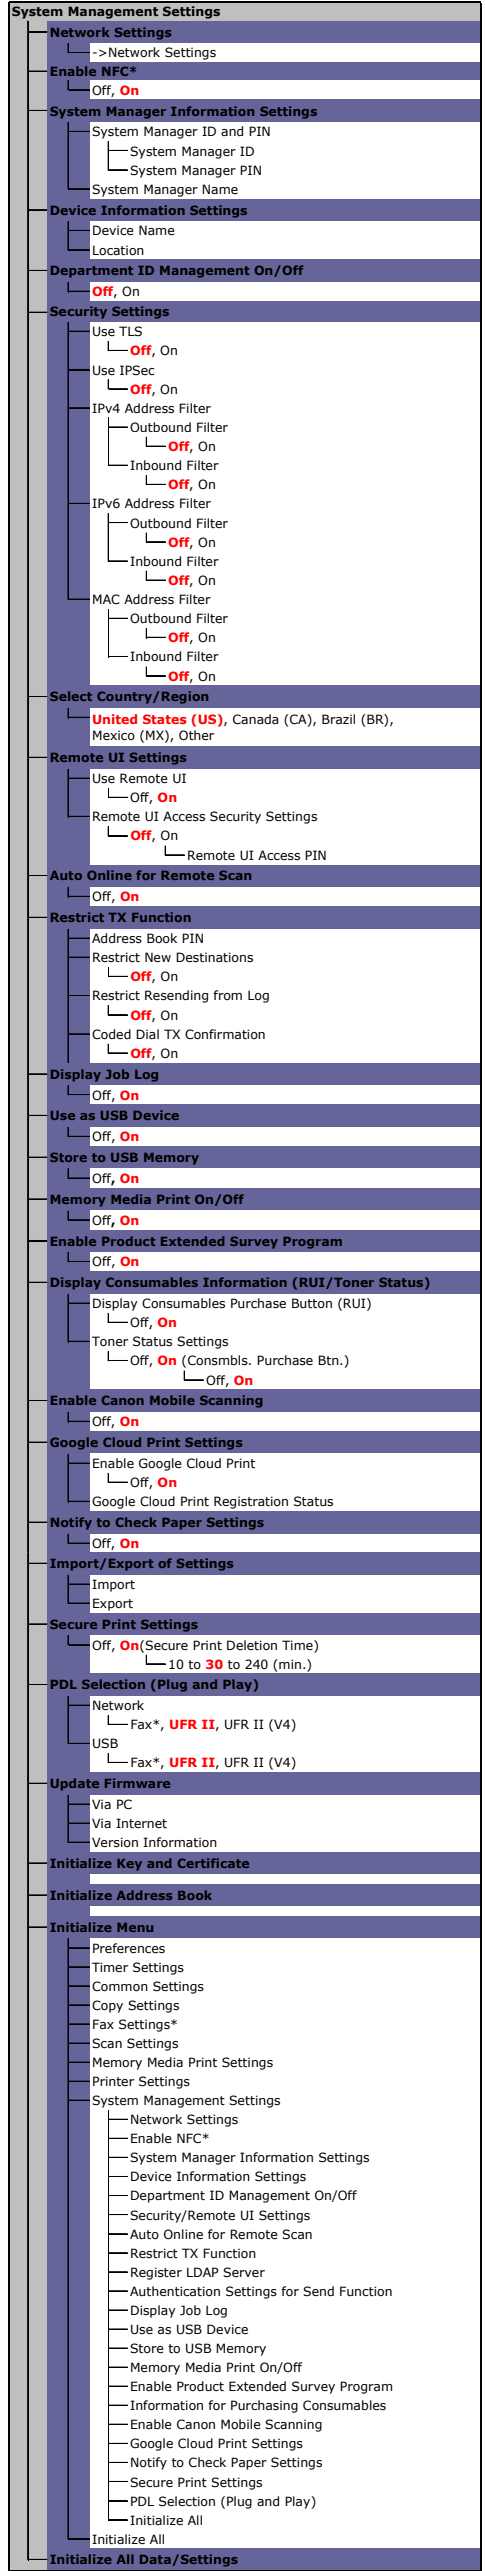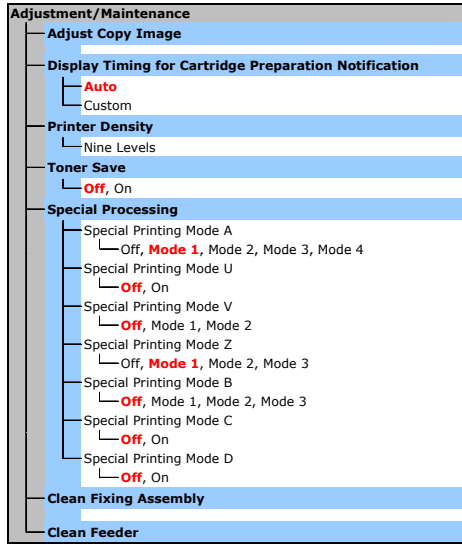

Settings marked with (*) are only available for the D1550.